

CROWN LAMINATES PHENOLIC PANEL
AVAILABLE IN 6mm TO 12mm

VERTICAL STAINLESS STEEL
OR GALVANIZED STEEL
HAT CHANNEL
MINIMUM 18 GA.

iCLAD HORIZONTAL THERMAL CLIP
H75 - 75mm (3") DEPTH
H100 - 100mm (4") DEPTH
H125 - 125mm (5") DEPTH
H150 - 150mm (6") DEPTH

#12 X 1" HWH SELF-DRILLING
MINIMUM 2 PER CLIP

iCLAD GIRT

NOTE:
REFER TO INSTALLATION MANUAL
OR PROJECT SPECIFIC SHOP
DRAWINGS FOR FASTENER SPACING.

50 MIN.
10
50 MIN.

#12-14 CARBON STEEL
CORROSION RESISTANT
COLOR MATCHED FASTENER
OR FASTENER AS SPECIFIED

INSULATION - PROJECT SPECIFIC
NOTCH INSULATION AROUND CLIPS
AND FILL GAPS

#14 X 2" HWH (2 PER CLIP)
OR AS REQUIRED
FOR BASE BUILDING

MEMBRANE - PROJECT SPECIFIC

50mm ADJUSTABILITY



SCALE:

1 : 2

DATE:

31-MARCH-2022


DRAWING TITLE:


CROWN LAMINATES
EXPOSED FASTENER
TYPICAL HORIZONTAL JOINT


SHEET

1 OF 9

CL1

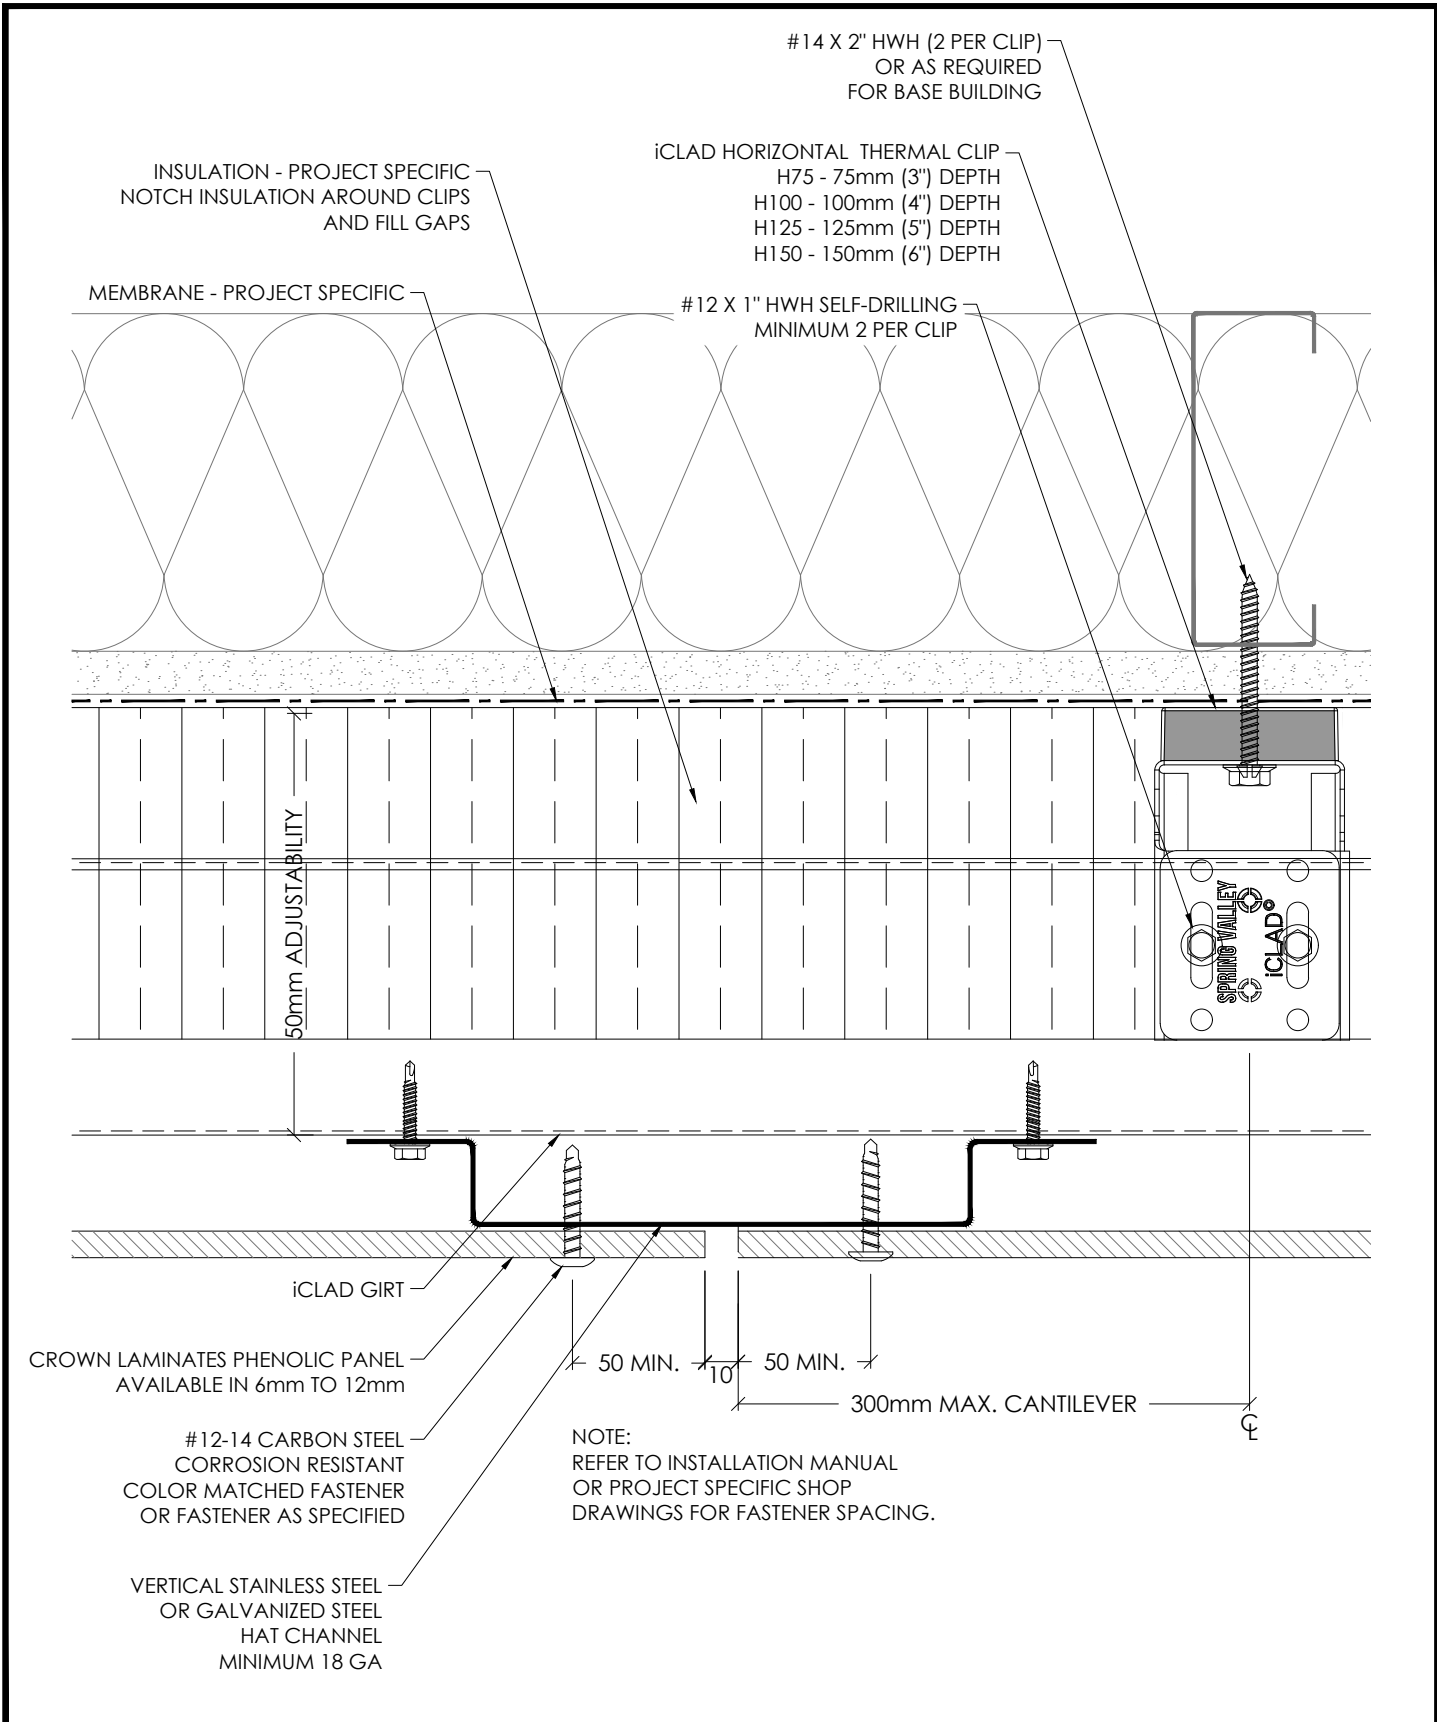

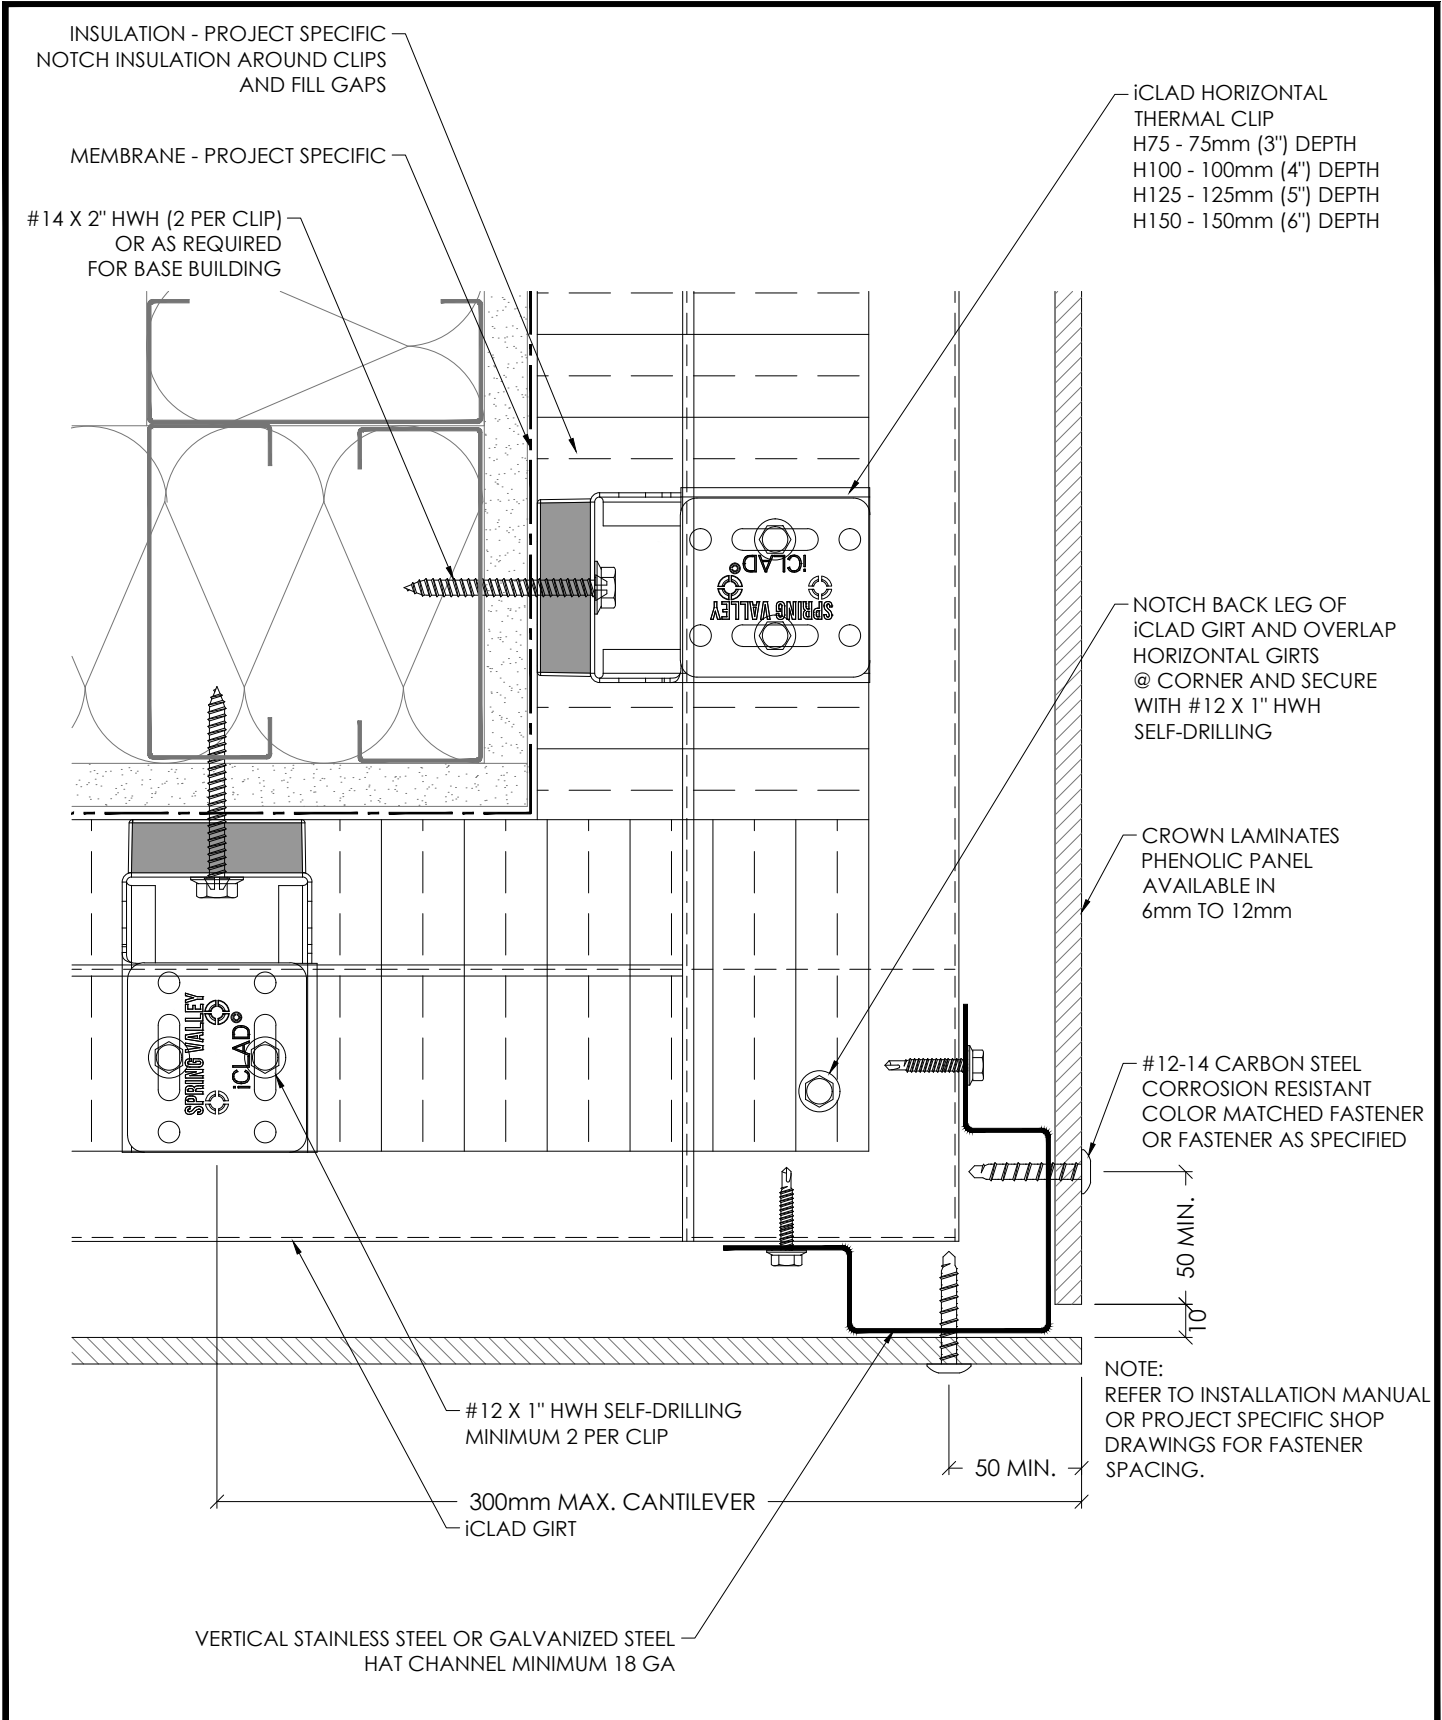

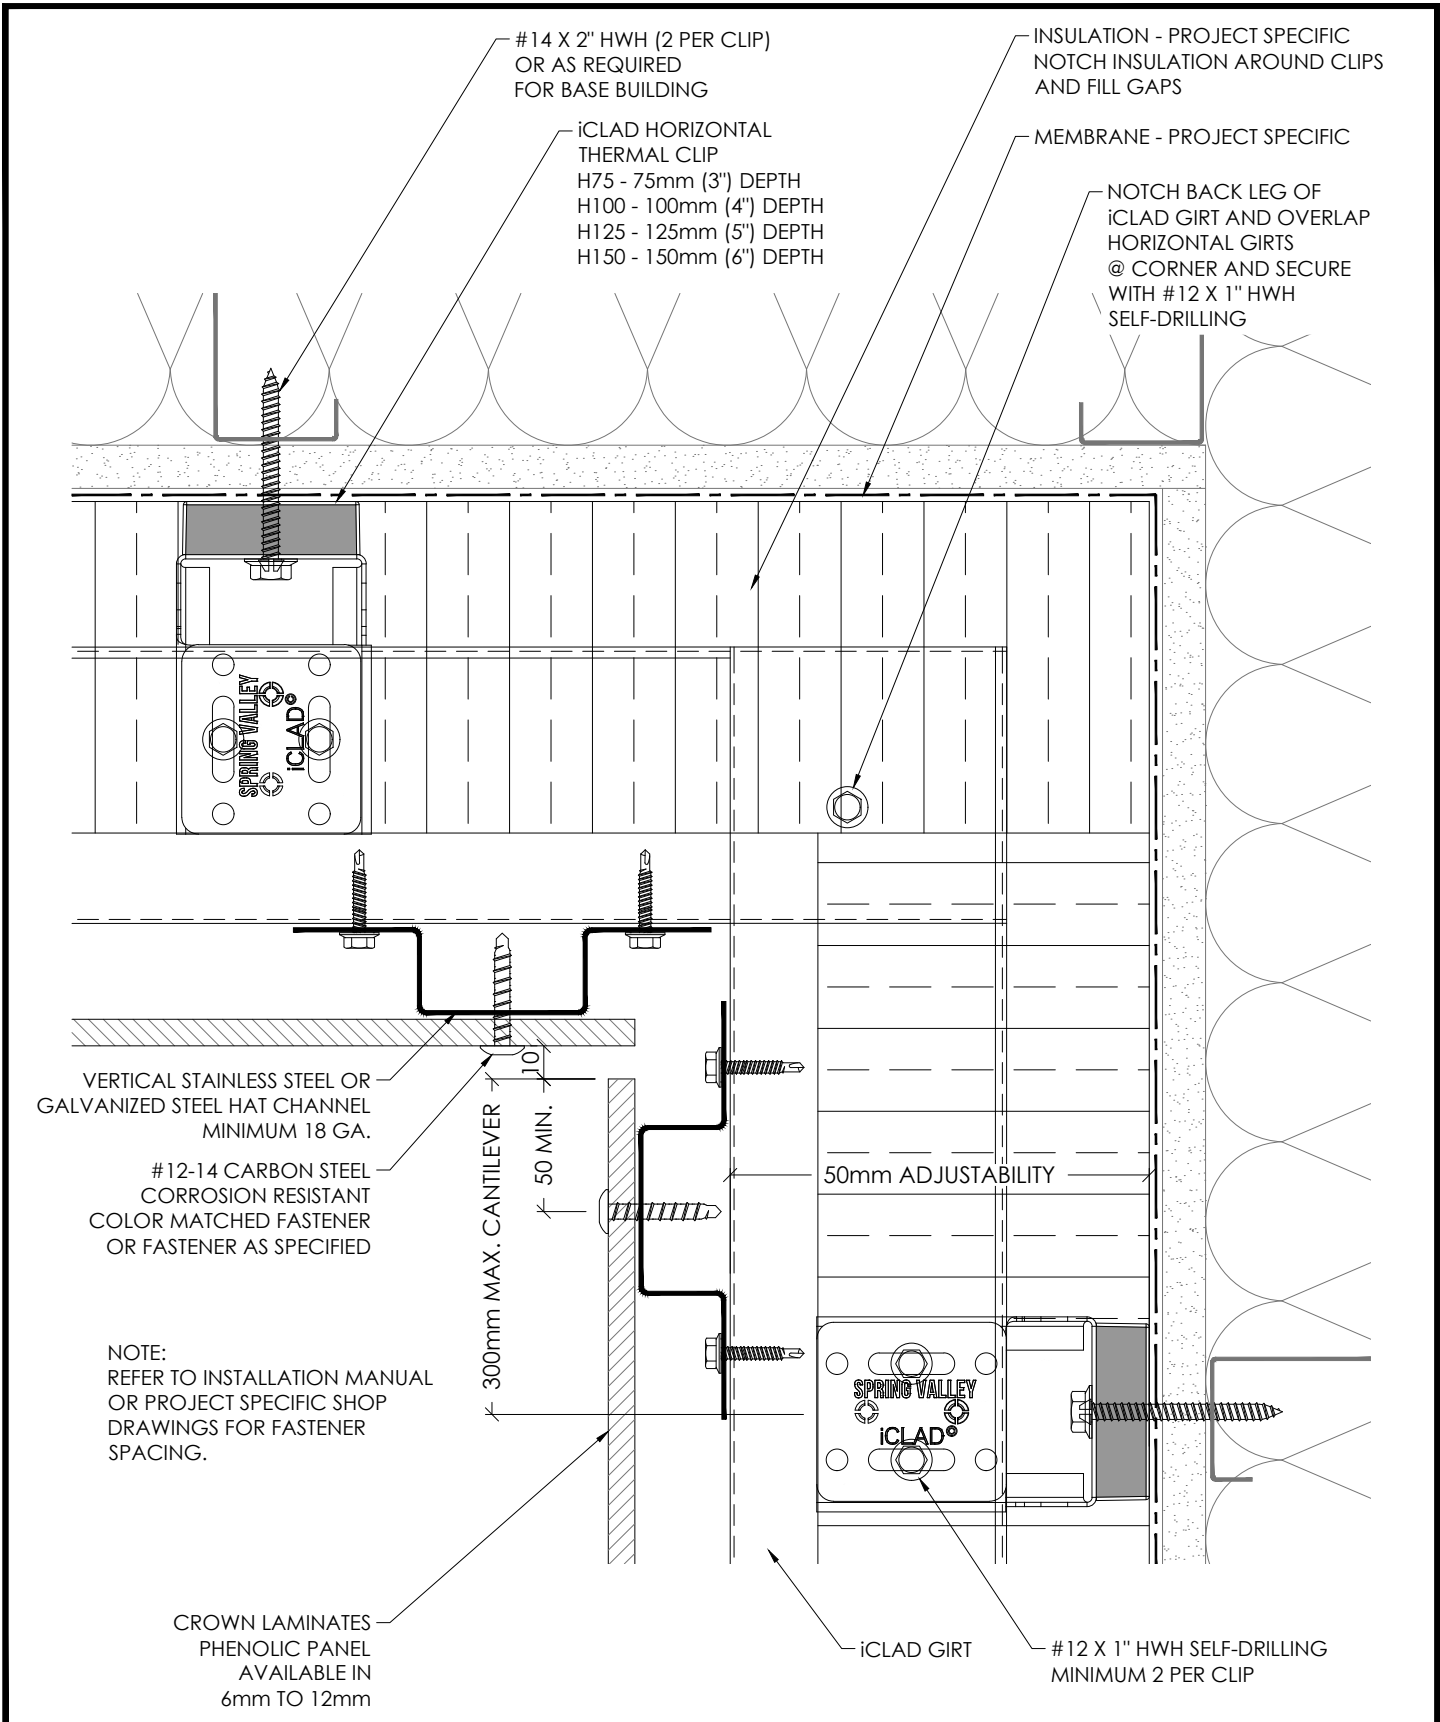

#14 X 2" HWH (2 PER CLIP)
OR AS REQUIRED
FOR BASE BUILDING

iCLAD HORIZONTAL THERMAL CLIP
H75 - 75mm (3") DEPTH
H100 - 100mm (4") DEPTH
H125 - 125mm (5") DEPTH
H150 - 150mm (6") DEPTH

#12 X 1" HWH SELF-DRILLING
MINIMUM 2 PER CLIP

iCLAD GIRT

VERTICAL STAINLESS STEEL
OR GALVANIZED STEEL
HAT CHANNEL
MINIMUM 18 GA

CROWN LAMINATES PHENOLIC PANEL
AVAILABLE IN 6mm TO 12mm

PERFORATED CLOSURE

#12-14 CARBON STEEL
CORROSION RESISTANT
COLOR MATCHED FASTENER
OR FASTENER AS SPECIFIED

NOTE:
REFER TO INSTALLATION MANUAL
OR PROJECT SPECIFIC SHOP
DRAWINGS FOR FASTENER
SPACING.

10
50 MIN.

AIR FLOW

50mm ADJUSTABILITY

THROUGH-WALL BASE FLASHING

INSULATION - PROJECT SPECIFIC
NOTCH INSULATION AROUND CLIPS
AND FILL GAPS

MEMBRANE - PROJECT SPECIFIC

CURTAINWALL

